

# SAT Fibre Optics

TRIAX fibre integrated reception systems  
- remove the limits from your installation



# Fibre beats Coax

Advantages for the installer, tenant and landlord in residential complexes



## TRIAX offer a complete range of solutions for your fibre installation.

TRIAX fibre is your preferred choice when you want:

- One discreet headend - distribute satellite, digital terrestrial and radio signals from a single location
- Design a system over a large area without jeopardising signal and quality
- Install a single fibre cable only rather than multiple coaxial cables



## Advantages for installers

- Great for saving time at SAT installations
- High reliability
- Significant cost savings
- Future-proof
- Noise distortion and interference-free transmission

## The fibre possibilities

- Very long distances with minimal attenuation
- Lighter and thinner than coaxial cable
- Pre-assembled cables up to 500 m
- UV-resistant
- No potential and transient currents
- No influence by external electric or magnetic fields
- Cost savings for thermal insulation and fire protection measures



## Advantages for tenant and landlord

- Very short installation times
- Best possible quality
- Maximum flexibility
- High fire safety
- Future-proof
- Energy saving in comparison to multiswitch installations

## When upgrading or new installation

- Receive all broadcast via satellites
- Supply several hundred apartments with only one Satellite dish station
- Increased user satisfaction
- Building aesthetics
- A fibre optic cable replaces four coaxial cables per satellite position
- 30 - 60% cost savings compared to alternative solutions \*
- Troublefree media supply

\* Based on the calculation of a net service company

## Television at the speed of light

## Page

|   |       |
|---|-------|
| ■ Overview of product assortment        | 4-5   |
| ■ Opto-LNBs                             | 6-7   |
| ■ IRS 1 for 1 SAT-Position + DTT/DAB/FM | 8     |
| ■ Active Splitter - TAS 04              | 9     |
| ■ Opto-Repeater - TOE 02                | 10-11 |
| ■ Opto-Reconverter - TVC05/TVQ05        | 12    |
| ■ Opto-Reconverter - TVC06/TVQ06        | 13-14 |
| ■ Opto-Multiswitch - TOM 08/16          | 15-17 |
| ■ Optical splitters with FC/PC          | 18    |
| ■ Optical splitters with SC/APC         | 19    |
| ■ Pre-assembled Fibre Cables            | 20    |
| ■ Connectors, Attenuators, Terminator   | 21    |
| ■ Optical meters, tools, accessories    | 22    |
| ■ Optical reception 4 x SAT             | 23    |





# SAT Fibre Optics


Optical transmission technology - the SAT-TV coverage of tomorrow



## Television at the speed of light - the transmission choice for the future

- SAT IF distribution over fibre optics (FO) allows to supply many households over larger distances, with feed from a central satellite dish station.
- Almost lossless transmission of satellite, DVB-T and DAB signals. Attenuation per 1000 m only about 0.3 dB.
- Future-proof and widest possible variety of channels
- All 4 SAT IF signals are transmitted over one optical fibre by using a Full Band Stacking LNB
- Space-saving installation - a 3 mm optical fibre replaces five 7 mm coaxial cables
- Provide hundreds of homes from only one LNB
- High cost savings already with 16 participants
- Optical fibre with galvanic isolation - resulting in increased lightning protection and no occurrence of ground and ground loops
- Quick and easy installation by using pre-assembled fibre optical cables

## Typical structure of a SAT-optic distribution system

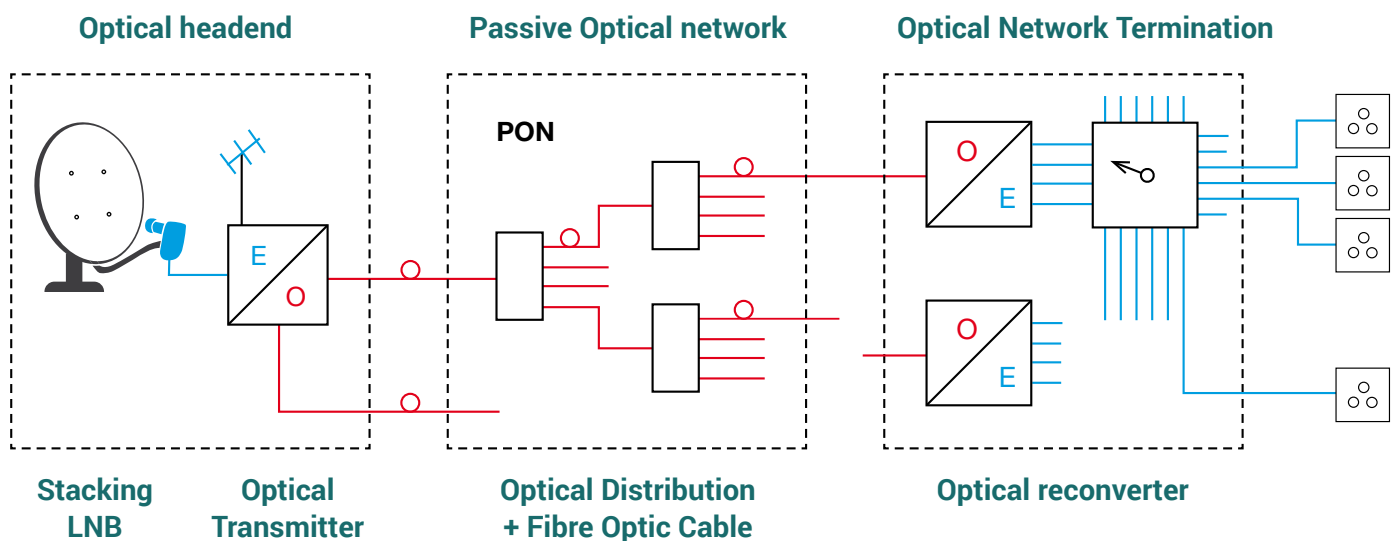

## Overview of TRIAX products for optical satellite IF transmission technology

| System  | Opto-LNB   | Opto-IRS   |
|---|--|--|
| Transmission capabilities<br>SAT<br>Terrestrial | 1 SAT position/4 polarities<br>-   | 1 SAT position/4 polarities<br>FM, DTT, DAB                      |
| Technical concept                               | Stacking-LNB included with optical transmitter 1310 nm                                       | Full band stacking-LNB with external optical transmitter 1310 nm |
| System components                               |  |  |
| Stacking LNB                                    | TOL 32, incl. integrated optical transmitter<br>TOL 64, incl. integrated optical transmitter | TWL 01 with N connector  |
| Optical transmitter                             |  | TOU 232 SA with 2 x opt. output                                  |
| Optical re-converter (sidecar)                  | TVC 05/TVQ 05<br>TVC 06/TVQ 06   | TVC 05/TVQ 05<br>TVC 06/TVQ 06                                   |
| Components for extension                        |  |  |
| Coaxial Active Splitter                         |  | TAS 04 + TUC 02 + TOU 232SA                                      |
| Opto Repeater                                   | TOE 02 + TOU 232 SA  | TOE 02 + TOU 232 SA  |
| Optical budget (max.)                           | TOL 32: 19 dB<br>TOL 64: 22 dB   | 2 x 19 dB  |
| Max. optical splitting                          | TOL 32: 32<br>TOL 64: 64   | 2x32 = 64  |
| - with extension<br>4x (TAS 04+TOU 232SA)       |  | 256  |
| - with extension<br>2x16x (TOE 02+TOU 232 SA)   | 1024   | 2048   |
| - in total (TAS 04 + TOE 02)                    |  | 8192   |



### Terms and definitions in a short explanation

#### PON

The Passive Optical Network (PON) is the distribution part of the network between optical headend and optical network termination with the Opto-Re-converters in. The PON consist of passive fibre optic components like fibre cables and optical splitters mainly.

#### Optical Split

The max. optical split defines to how many fibre lines with an optical termination unit on the optical reception side can be driven from the output of the optical transmitter. The max. optical split of 32 for a Opto-LNB TOL 32 means that the optical signal can be split to up to 32 fibre lines. Until that symmetrical split the input signal on the optical re-converters still have a level to provide an electrical output signal in sufficient quality.

#### Optical Budget

The optical budget is the most important characteristic of an optical link. It defines the upper limit of the insertion loss of a fibre link in the PON. The insertion loss of a link is the sum of the attenuation of all single network elements like splitters, cables and connectors in an optical link of the PON.

The max. optical budget defines also the the min. input level of the optical re-converter. The min. input level is the optical output power of the in dBm minus the max optical budget. Example: the optical output power of the Opto-LNB TOL 32 is about +7 dBm and the max. optical budgets is 19 dB. Thus the level of the optical signal on the input of the optical re-converter should not be less than 7 dBm - 19 dB = -12 dBm.

The optical budget in this brochure is the fix specified max. optical link attenuation for all network design. The output power of the transmitters and the min. input level of the re-converters are for rough information only.

# Opto-LNB

## Stacking LNBs with integrated optical transmitter



### Opto-LNB for 1 satellite position, fibre splitting 32/64, 1310 nm.

The Opto-LNB consists of low noise block converter and an optical transmitter. The LNB stacks the 4 SAT-IF-bands of a SAT-Position into a super broad band IF of 950...5450 MHz. Thus the 4 SAT-IF-bands can be transmitted over one fibre line.

- Stacking LNB with optical output for splitting to max. 32 or 64 fibre links
- Optical wavelength 1310 nm
- Power supply via external power supply (included) via F connector
- Compatible with optical re-converter TVQ (Quatro) and TVC (Quad) as well as Opto Multiswitch TOM

### Overview of TRIAX Optical-LNB

| Type  |        | TOL 32                   | TOL 64                   |
|---|--------|--------------------------|--------------------------|
| Art. No.  |        | 307610                   | 307611                   |
| System  |        | LNB for 32 fibre links   | LNB for 64 fibre links   |
| RF-Frequencies                                    |        |                          |                          |
| Input frequency range                             | GHz    | 10,7 – 12.75             |                          |
| Band stacking, vertical/ horizontal               | GHz    | 0.950 – 3.0              |                          |
| Frequency range horizontal, L+H, stacked          | GHz    | 3.4 – 5.45               |                          |
| Polarisation                                      | Linear |                          | horizontal and vertikal  |
| Characteristics                                   |        |                          |                          |
| Optical wavelengths                               | nm     | 1310                     | 1310                     |
| Optical power, (nominal @ 25°C)                   | dBm    | 7.0                      | 8.5                      |
| Optical budget for PON (with TVQ/TVC)             | dB     | 19.0                     | 22.0                     |
| Noise figure (typical/max. @ 25°C)                | dB     | 0.5                      | 0.5                      |
| Gain  | dB     | 62...72                  | 62...72                  |
| L.O-Frequency, vertical                           | GHz    | 9.75                     | 9.75                     |
| L.O-Frequency, horizontal                         | GHz    | 7.3                      | 7.3                      |
| Image rejection (min.)                            | dB     | 40                       | 40                       |
| Cross polarization (typ./min.)                    | dB     | 30/25                    | 30/25                    |
| Power consumption                                 |        |                          |                          |
| Supply voltage, nominal/ maximum survival voltage | VDC    | 12                       | 20                       |
| Current consumption                               | mA     | < 450                    | < 300                    |
| General   |        |                          |                          |
| DC input connector                                |        | F-female type            | F-female type            |
| Optical output connector                          |        | FC/PC                    | FC/PC                    |
| Feedhorn diameter                                 | mm     | 40                       | 40                       |
| Operating temperature range                       | °C     | -30 - +60                | -30 - +60                |
| Power supply unit (included)                      |        | TPS 322 PSU (12 V/0.5A), | TPS 323 PSU (20 V/1,2A), |
| Spare part - Power supply- Art.No.                |        | 307658                   | 307657                   |

# Opto-LNB


| Optical receiver - 1 x SAT

## Typical network structure for the receipt and distribution of optical satellite signals via a satellite position

Reception of 1 SAT position incl. all 4 SAT bands with Opto-LNB TOL 32 / TOL 64

### Installation tips

- Insert optical attenuator TFA (see page 21) if optical input level at optical re-converter TVQ/TVC is more than 0 dBm.
- Usually the optical splitters TOS and re-converters TVQ are installed in a distribution box in the basement of the building (FTTB).

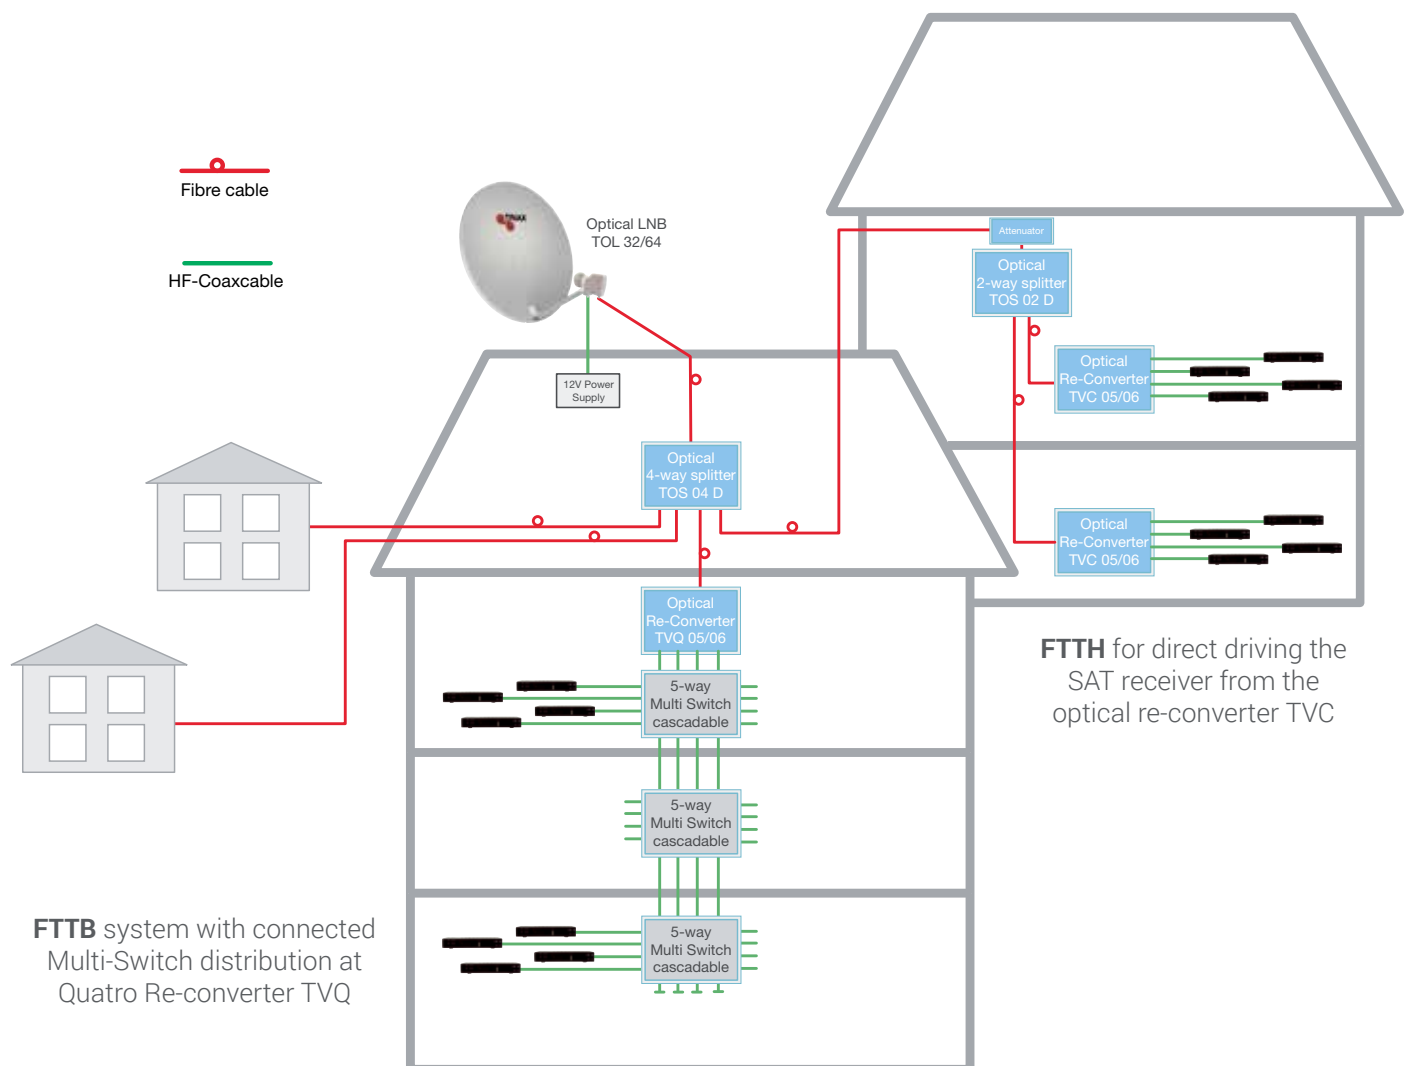

# Integrated Reception System

| IRS 1 for 1 SAT-Position + DTT/DAB/FM

**The TOU 232 kit consists of the stacking LNB TWL 01, Optical Transmitter TOU 232 SA (SAT + Terrestrial), N-cable TUC 02 (2m), PSU 20V, Mast mounting plate, terminator.**

- The 4 SAT bands are stacked in the full-band LNB TWL 1. The SAT IF signal 950...5450 MHz is connected via the high performance coaxial N-cable TUC to the optical transmitter TOU 232 SA.
- The terrestrial signals are connected to the optical transmitter directly.
- The optical transmitter converts the SAT and Terr signal into 2 optical output signals with 1310 nm wavelength
- Each optical output can be split upto 32 ways with each output feeding a TVC or TVQ re- converter or a TOM multiswitch
- External PSU 20V (included)



- The optical signal can be split up to 8 x 32 ways by using the active coaxial splitter TAS 04 that can drive up to 4 x TOU 232 SA optical transmitters

## Technical specification

| Type  |        | TWL 01                            | TOU 232 SA   | TOU 232 Kit  |
|---|--------|-----------------------------------|--|--|
| Art. No.                                      |        | 307612                            | 307615   | 307614   |
| System  |        | Full stacking LNB, coaxial output | Opt. transmitter for 1xSAT + terr. max. splitting 2 x 32 | Kit, consisting of TWL 01, TOU 232 SA, N-cable, PSU, accessories |
| SAT range                                     |        |                                   |  |  |
| Input frequency range                         | GHz    | 10.7 – 12.75                      | 0.95...5.450   | 10.7 – 12.75   |
| Output frequency range LNB                    | GHz    | 0.95...5.450                      |  | 0.95...5.450   |
| Frequency range vertical, stacked, VL+VH      | GHz    | 0.950 – 3.0                       |  | 0.950 – 3.0  |
| Frequency range horizontal, stacked, HL+HH    | GHz    | 3.4 – 5.45                        |  | 3.4 – 5.45   |
| Polarisation                                  | Linear | horizontal and vertical           |  | horizontal and vertical  |
| Terrestrial frequency and input level range   |        |                                   |  |  |
| DVB-T   | MHz    |                                   | 470...854 (70 -3 +27 dBμV)*                              |  |
| DAB   | MHz    |                                   | 213...230 (58 -3 +27 dBμV)                               |  |
| FM  | MHz    |                                   | 87...108 (70 -3 +27 dBμV)                                |  |
| Remote feed terr. amplifiers                  |        |                                   | 11,5 V/<80 mA  |  |
| Characteristics                               |        |                                   |  |  |
| Optical wavelength                            | nm     |                                   | 1310   | 1310   |
| Optical output level (nom. @25 °C)            | dBm    |                                   | 2 x 7.0  | 2 x 7.0  |
| Optical budget for PON (with TVQ/TVCO5)       | dB     |                                   | 2 x 19.0   | 2 x 19.0   |
| Noise figure (typ. @25°C)                     | dB     | 0.5                               |  | 0.5  |
| Gain  | dB     | 62...72                           |  | 62...72  |
| L.O frequency, vertical / horizontal          | GHz    | 9.75 / 7.3                        |  | 9.75 / 7.3   |
| Image frequency rejection (min.)              | dB     | 40                                |  | 40   |
| Isolation (typ.)                              | dB     | 30                                |  | 30   |
| Spurious output (950MHz-3GHz, 3.4GHz-5.45GHz) | dBc    | -25                               |  | -25  |
| LNB   |        |                                   |  |  |
| Connector RF output, DC power supply          |        | N female                          |  | N female   |
| Diameter feed                                 | mm     | 40                                |  | 40   |
| Operating temperature range                   | °C     | -30 - +60                         |  | -30 - +60  |
| Optical transmitter                           |        |                                   |  |  |
| Port SAT in / Port DTT/DAB in                 |        |                                   | N female / F female                                      |  |
| Port Opt out1 and Opt out 2                   |        |                                   | 2 x FC/PC  |  |
| Operating temperature range                   |        |                                   | -20 - +50  |  |
| Power supply (via opt. receiver)              |        |                                   |  |  |
| Power supply, nominal                         | VDC    |                                   | 20   |  |
| Power consumption                             | mA     |                                   | < 450  |  |
| Power supply unit (included)                  |        |                                   | TPS 323 PSU (20 V/1,2A)                                  |  |
| Spare part - Power supply- Art.No.            |        |                                   | 307657   |  |



# Integrated Reception System

## | TAS 04 Active Coax-Splitter

### Expanding the Fibre network on Opto-Transmitter side


TAS 04 is an active coaxial splitter to drive up to 4 optical transmitters TOU 232 SA connected by the N-cable TUC 002 (please order separately)

- Active splitter without insertion loss
- The optical splitting of an IRS 1 system can be expanded up 4 x (2x32) = 256 by using the TAS 04 connected to 4 x optical transmitter TOU 232 SA.
- The distributor TAS 04 is connected via coaxial cable TUC with the Stacking LNB TWL 01 and the IRS-transmitters TOU.
- Power is supplied via the coaxial cable TUC from the IRS transmitter TOU.



### Technical specification

| Type            | TAS 04 |             |
|-----------------|--------|-------------|
| Art. No.        | 307616 |             |
| Frequency range | GHz    | 0.95 - 5.5  |
| No. of inputs   | 1      |             |
| No. of outputs  | 4      |             |
| Connection      | N      |             |
| Coupling ratio  | %      | 25/25/25/25 |

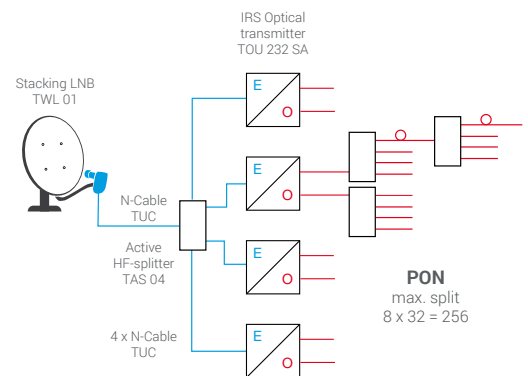

### Coaxial patch cable with N-connector

Coaxial link to connect:

- Stacking LNB TWL 01 with optical transmitter TOU 232 SA
- Stacking LNB TWL 01 with active splitter TAS 04
- Splitter TAS 04 with optical transmitters TOU 232 SA



### Pre-assembled cable with N connector

| Type           | TUC 001     | TUC 002 | TUC 003 | TUC 005 | TUC 010 |    |
|----------------|-------------|---------|---------|---------|---------|----|
| Art. No.       | 307601      | 307602  | 307603  | 307604  | 307605  |    |
| Assembled with | N-Connector |         |         |         |         |    |
| Diameter cable | mm          |         | 10      |         |         |    |
| Cable length   | m           | 0.5     | 2       | 3       | 5       | 10 |

# Integrated Reception System

## | TOE 02 Optical-to Electrical Repeater

### Expanding the Fibre network by Opto-Repeater

The TOE 02 is to be used in conjunction with the optical transmitter TOU 232 SA as a kind of repeater to increase the number of subscriber on a fibre line. That allows to deploy very large fibre optic plants for SAT-IF distribution with the capability of an expanded optical splits locally and far away from the the central dish.

The TOE 02 has the funktiion to convert the optical signal from the Opto-LNB or IRS1 transmitter to electrical signals for feeding another optical transmiiter TOU 232 SA

- Expands the optical split of a fibre line up to 2x32
- The splitt of the passive optical network (PON) before the repeater should not be more than 16
- Maximum of optcal split in an IRS 1:  
2048 = (TOU = 2x16) x (TOE+TOU = 2x32)



- Additional expanding of split by factor 4 by use of active coaxial splitter TAS 04 for driving more IRS1 transmitters (TOU 232SA) up to 8192
- Power supply of the TOE 02 is carried over the coaxial patch cable TUC 02 from the TOU 232 SA.

### Technical specification

| Type  | TOE 02                          |   |
|---|---------------------------------|---|
| Art. No.  | 307694                          |   |
| Functionality   | Optical-to-electrical converter |   |
| Optical Input   |                                 |   |
| Input Power   | dBm                             | -12...-3  |
| Wavelength  | nm                              | 1310/1550   |
| Input RF frequency range, vertical                      | GHz                             | 0.95 – 3.0  |
| Input RF frequency range, horizontal                    | GHz                             | 3.4 – 5.45  |
| Terrestrial frequency range, DVB-T                      | MHz                             | 470...854   |
| Terrestrial frequency range, DAB                        | MHz                             | 174...241   |
| Terrestrial frequency range, DTT                        | MHz                             | 87...108  |
| Input connector   |                                 | FC/PC   |
| Output SAT  |                                 |   |
| Stacked SAT-IF signal                                   | MHz                             | 950...5450  |
| Impedance, nominal                                      | Ohm                             | 50  |
| Return loss (min.)                                      | dB                              | 9   |
| Flatness across band                                    | dB                              | 4   |
| Output Level SAT  | dBμV                            | 80  |
| Outputs Terrestrial                                     |                                 |   |
| Terrestrial frequency range, DVB-T                      | MHz                             | 470...854   |
| Terrestrial frequency range, DAB                        | MHz                             | 174...240   |
| Terrestrial frequency range, DTT                        | MHz                             | 87...108  |
| Impedance, nominal                                      | Ohm                             | 75  |
| Output Level DTT (DAB level -14dB respect to DTT)       | dBμV                            | 87  |
| General Data  |                                 |   |
| Output connector SAT                                    |                                 | N-female  |
| Output connector TER                                    |                                 | F-female  |
| Input connector DC                                      |                                 | F-female  |
| Current consumption                                     | mA                              | 65 @ 20V  |
| Input Voltage (fed from TOU 232SA or optional from PSU) | V                               | 10...24   |
| Operating temperature                                   | °C                              | -10...+50   |
| Weight  | kg                              | 0,45  |
| Dimensions  | mm                              | 160 x 167x 30   |
| Accessories   |                                 |   |
| Power supply (optional)                                 |                                 | TPS 323 PSU (100-240 VAC +20VDC/1.2A),<br>Art. No. 307657 |



# Integrated Reception System

| Installation example with Opto Repeater TOE 02 + TOU 232 SA

## Expanding the Fibre network by Opto-Repeater for 1xSAT + DTT/DAB/FM

### Installation tips

- The terrestrial reception should be implemented by a multi-band amplifier from the GNS or TMB series.
- The network can be extended for a second SAT position by installation of an Opto-LNB with an additional fibre distribution network in parallel.

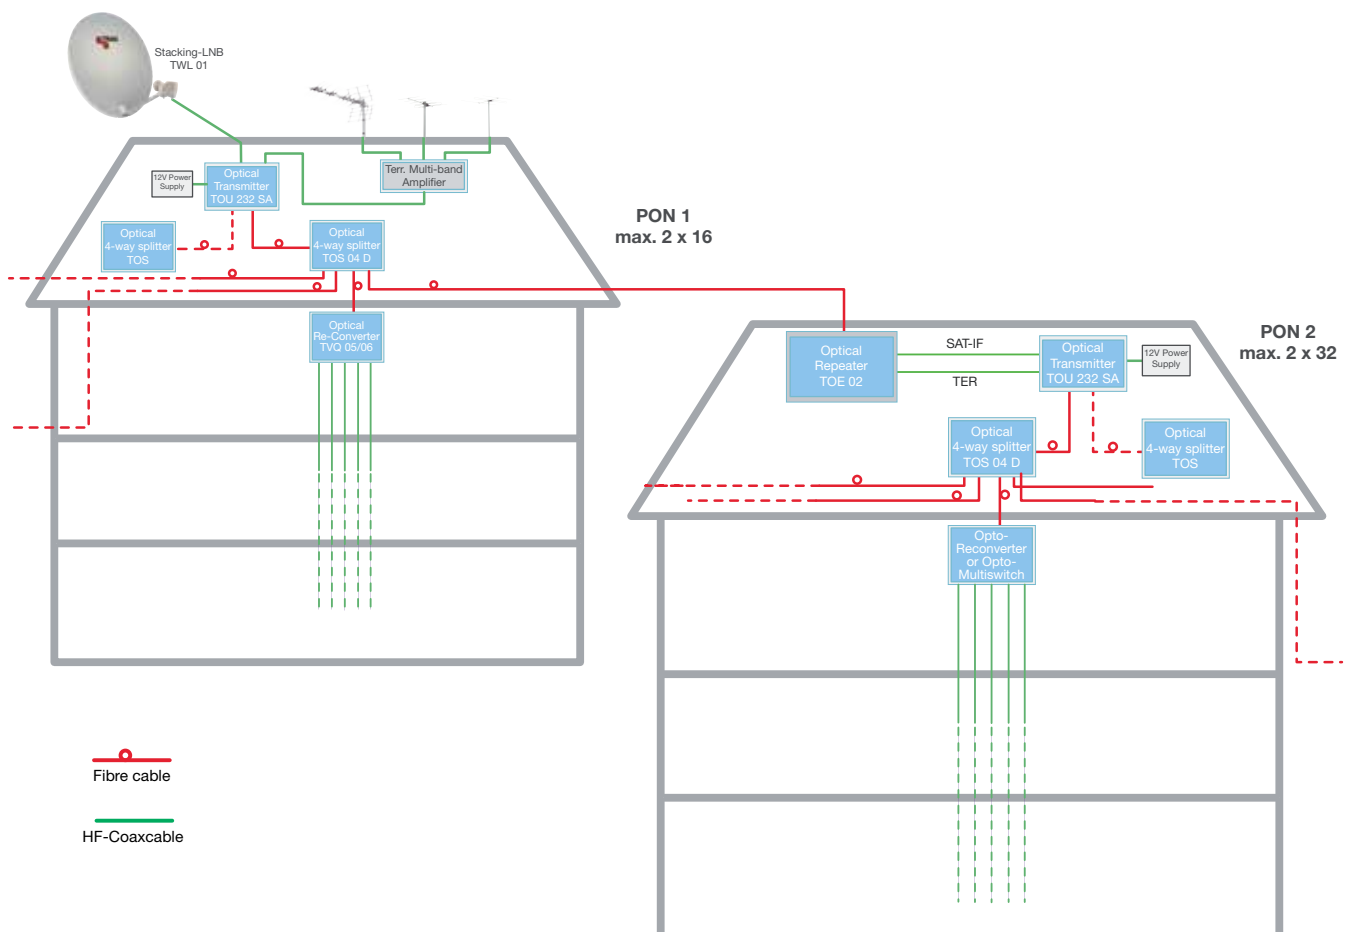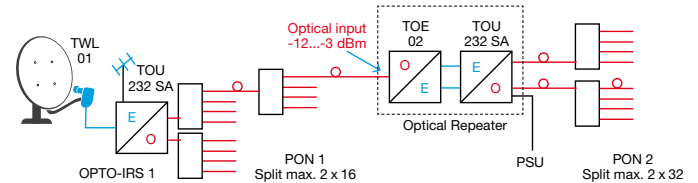

# Opto-Reconverters

## | TVC 05 Quad / TVQ 05 Quatro

### Optical Re-Converters for Opto-LNB and IRS 1

The TVC 05 and TVQ 05 Virtual Optical Receiver Nodes are optical-to-coax converters which convert frequency stacked optical signals from an Opto-LNB TOL or a TOU 232-Kit (IRS 1) Sidecar unit into a legacy universal single coax signal. The converters also provide a coax DTT/DAB/FM signal diplexed onto each output (TVC 05), or onto a separate output (TVQ 05) when it is inserted into the optical transmitter TOU 232 SA.

- Compatible with optical LNB TOL 32 /64 and optical transmitter TOU 232 /kit
- Built in AGC which allows a wide dynamic range of optical signals without impact to output level and quality.
- Two LED indicators display operation status.
- Easy mounting via a wall baseplate
- Power supply via RF output by SAT receiver (TVC 05) or by multiswitch (TVQ 05).
- Optional external power supply for continuous operation available: TPS 323 PSU
- Attention: Please insert an attenuator TFA (5/10/15 dB) if the optical attenuation of the passive optical network (PON) is less than 10 dB



### Technical specification

| Type  |      | TVC 05   | TVQ 05  |
|---|------|--|---|
| Art. No.                                    |      | 307627   | 307629  |
| System                                      |      | Quad + terrestrial                                     | Quattro + terrestrial<br>for use with multiswitches |
| Fibre Optical Input                         |      |  | FC/PC   |
| Input Power with TOL 32, TOU 232SA/TOL 64   | dBm  |  | -12...0 / -15...0                                   |
| Wavelength                                  | nm   |  | 1310/1550   |
| Input frequency range, vertical             | GHz  |  | 0.95 – 3.0  |
| Input frequency range, horizontal           | GHz  |  | 3.4 – 5.45  |
| Terrestrial frequency range, DVB-T          | MHz  |  | 470...854   |
| Terrestrial frequency range, DAB            | MHz  |  | 174...241   |
| Terrestrial frequency range, FM             | MHz  |  | 87...108  |
| Input connector                             |      |  | FC/PC   |
| Outputs SAT                                 |      |  |   |
| Horizontal High Band (4.4 to 5.45 GHz)      | MHz  | 1100-2150, > 15,5 V 22 kHz                             | fix   |
| Vertical High Band (1.95 to 3.0 GHz)        | MHz  | 1100-2150, < 14,5 V 22 kHz                             | fix   |
| Horizontal Low Band (3.4 to 4.4 GHz)        | MHz  | 950-1950, > 15,5 V                                     | fix   |
| Vertical Low Band (0.95 to 1.95 GHz)        | MHz  | 950-1950, < 14,5 V                                     | fix   |
| Impedance, nominal                          | Ohm  | 75   | 75  |
| Return loss (min.)                          | dB   | 10   | 10  |
| Automatic Gain Control (AGC)                | dB   | 30   | 30  |
| Output Level SAT                            | dBμV | approx. 70   | approx. 75  |
| Outputs Terrestrial                         |      |  |   |
| Terrestrial frequency range, DVB-T          | MHz  | 470...854  | 470...854   |
| Terrestrial frequency range, DAB            | MHz  | 174...240  | 174...240   |
| Terrestrial frequency range, FM             | MHz  | 87...108   | 87...108  |
| Output Level                                | dBμV | approx. 68   | approx. 68  |
| Common Data                                 |      |  |   |
| Output connectors                           |      | 4 x F (4 x SAT/terr.)                                  | 5 x F (4xSAT+1xterr.)                               |
| Current consumption                         | mA   | <220 @ 10 V  | <220 @ 10 V   |
| Input Voltage                               | V    | 10...20  | 10...20   |
| Operating temperature                       | °C   | feed from Sat receiver<br>0...+40                      | feed from multi-switch<br>0...+40                   |
| Weight                                      | kg   | 0,8  | 0,8   |
| Dimensions                                  | mm   | 110 x 136 x 50   | 110 x 136 x 50                                      |
| Accessories                                 |      |  |   |
| Power supply unit (please order separately) |      | TPS 323 PSU (100-240 VAC +20VDC/1.2A), Art. No. 307657 |   |

# Opto-Reconverters

| TVC 06 Quad mini, TVQ 06 Quatro mini

## New Generation of Re-converters for Opto-LNB and IRS 1

The TVC 06 and TVQ 06 Virtual Optical Receiver Nodes are optical-to-coax converters, which convert frequency stacked optical signals from an Opto-LNB TOL or a TOU232-KIT (IRS 1) Sidecar unit into a legacy universal single coax signal.

The series TVC/TVQ 06 use a new chip technology which allows a smaller size of the devices, and a higher output level compare to the series 05 on the page before.



- Compatible with optical LNB TOL 32 /64 and optical transmitter TOU 232 /kit
- Built in AGC which allows a wide dynamic range of optical signals without impact to output level and quality.
- Two LED indicators display operation status.
- Power Supply via RF-output from SAT-receiver (TVC06) or from TVQ 06 and Multiswitch
- Optional external power supply for continuous operation available: TPS 323 PSU
- Attention: Please insert an attenuator TFA (5/10/15 dB) if the optical attenuation of the passive optical network (PON) is less than 10 dB

## Technical specification

| Type  |      | TVC 06   | TVQ 06 *  |
|---|------|--|---|
| Art. No.                                      |      | 307641   | 307640  |
| Design  |      | Quad + terrestrial                                     | Quatro + terrestrial<br>for the use with multi-switches |
| Optical Input                                 |      |  |   |
| Input Power with TOL 32, TOU 232SA/TOL 64     | dBm  | -12...0 / -15...0                                      |   |
| Wavelength                                    | nm   | 1310/1550  |   |
| Input RF frequency range, vertical            | GHz  | 0.95 – 3.0   |   |
| Input RF frequency range, horizontal          | GHz  | 3.4 – 5.45   |   |
| Terrestrial frequency range, DVB-T            | MHz  | 470...854  |   |
| Terrestrial frequency range, DAB              | MHz  | 174...241  |   |
| Terrestrial frequency range, DTT              | MHz  | 87...108   |   |
| Input connector                               |      | FC/PC  |   |
| Outputs SAT                                   |      |  |   |
| Horizontal High Band (input: 4.4 to 5.45 GHz) | MHz  | 1100-2150, > 15,5 V 22 kHz                             | fix   |
| Vertical High Band (input: 1.95 to 3.0 GHz)   | MHz  | 1100-2150, < 14,5 V 22 kHz                             | fix   |
| Horizontal Low Band (input: 3.4 to 4.4 GHz)   | MHz  | 950-1950, > 15,5 V                                     | fix   |
| Vertical Low Band (input: 0.95 to 1.95 GHz)   | MHz  | 950-1950, < 14,5 V                                     | fix   |
| Impedance, nominal                            | Ohm  | 75   | 75  |
| Return loss (min.)                            | dB   | 10   | 10  |
| Automatic Gain Control (AGC)                  | dB   | 30   | 30  |
| Output Level SAT                              | dBμV | ca. 75   | ca. 79  |
| Outputs Terrestrial                           |      |  |   |
| Terrestrial frequency range, DVB-T            | MHz  | 470...854  | 470...854   |
| Terrestrial frequency range, DAB              | MHz  | 174...240  | 174...240   |
| Terrestrial frequency range, DTT              | MHz  | 87...108   | 87...108  |
| Output Level DTT                              | dBμV | ca. 65   | ca. 79  |
| Common Data                                   |      |  |   |
| Output connectors                             |      | 4 x Ff (4 x SAT/TER)                                   | 5 x Ff (4xSAT+1xTER)                                    |
| Current consumption                           | mA   | 125 @ 20V; 225 @ 10V                                   | <400 @ 20V  |
| Input Voltage                                 | V    | 10...20  | 10...20   |
|   |      | from receiver  | from multiswitch  |
| Operating temperature                         | °C   | -15...+60  | -15...+60   |
| Weight  | kg   | 0,8  | 0,8   |
| Dimensions                                    | mm   | 128 x 94 x 27  | 97 x 61 x 26  |
| Accessories                                   |      |  |   |
| Power supply TPS 323 PSU (optional)           |      | TPS 323 PSU (100-240 VAC +20VDC/1.2A), Art. No. 307657 |   |

\*) preliminary data




# Opto-Reconverter

| TVC/TVQ in application with IRS 1

Typical network structure for optical distribution of IRS1 (1xSAT + DTT/DAB/FM) by use of Opto-Transmitter TOU 232Kit and Re-converter TVC / TVQ

## Installation tips

- The terrestrial reception should be implemented by a multi-band amplifier from the GNS or TMB series.
- The network can be extended for a second SAT position by installation of an Opto-LNB with an additional fibre distribution network in parallel.

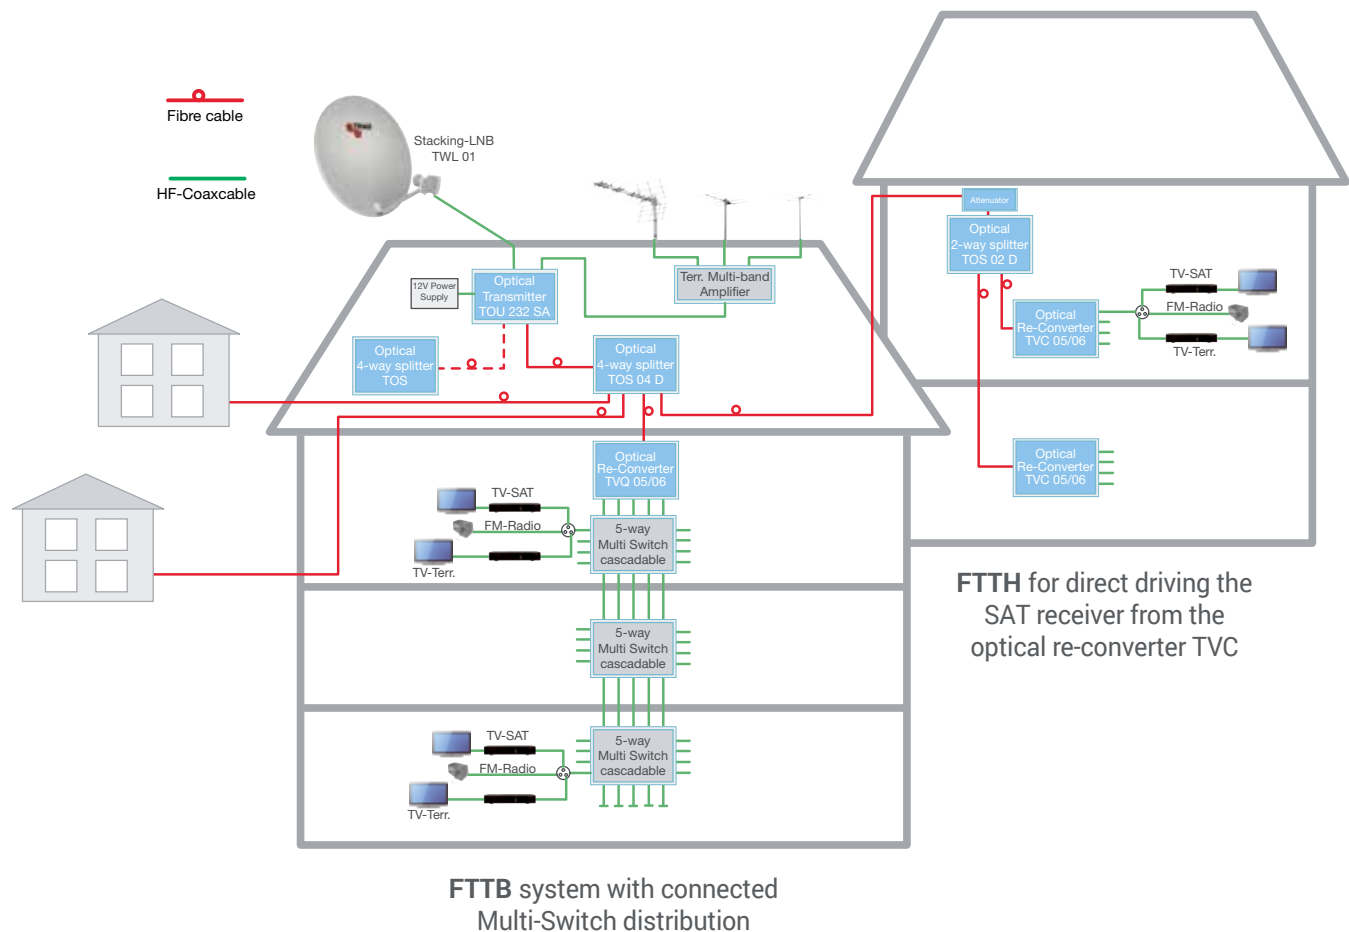

# Opto-Multiswitch

| SwitchMaster TOM 08 M / 16 M + SwitchSlave TOM 08 S / 16 S

**The TRIAX Opto-Multiswitch TOM combines the Optical Re-converter with an integrated Multiswitch in a sophisticated way.**

The Opto Multiswitch features a built-in optical-to-coaxial Re-converter. All SAT-IF bands along with Terrestrial signals are available on every output.

The Opto Switch Master is the standalone base unit for reception of one SAT position and terrestrial broadcast signals. Two versions are available with 8 or 16 outputs.


Reception can be extended to 2, 3 or 4 satellites by plugging additional Opto Switch Slave units into the Opto Switch Master.

- Compatible with the Optical LNB TOL 32 / TOL 64 or Optical IRS 1 which includes TER (DTT, DAB, FM)
- Very compact form factor and reliable design on base of the new chip set in ASIC technology
- Ideal for SAT FTTH/FTTB networks because of easy and space-saving installation without any coaxial patch cables between re-converter and multi-switch
- Easy upgrade for reception of more than one satellite position.



- Included desk top PSU only for Master necessary
- Capability of Frequency Morphing by software to adapt to other SAT standards in world

## SWITCH SLAVES ARE PLUGGED ON MASTER

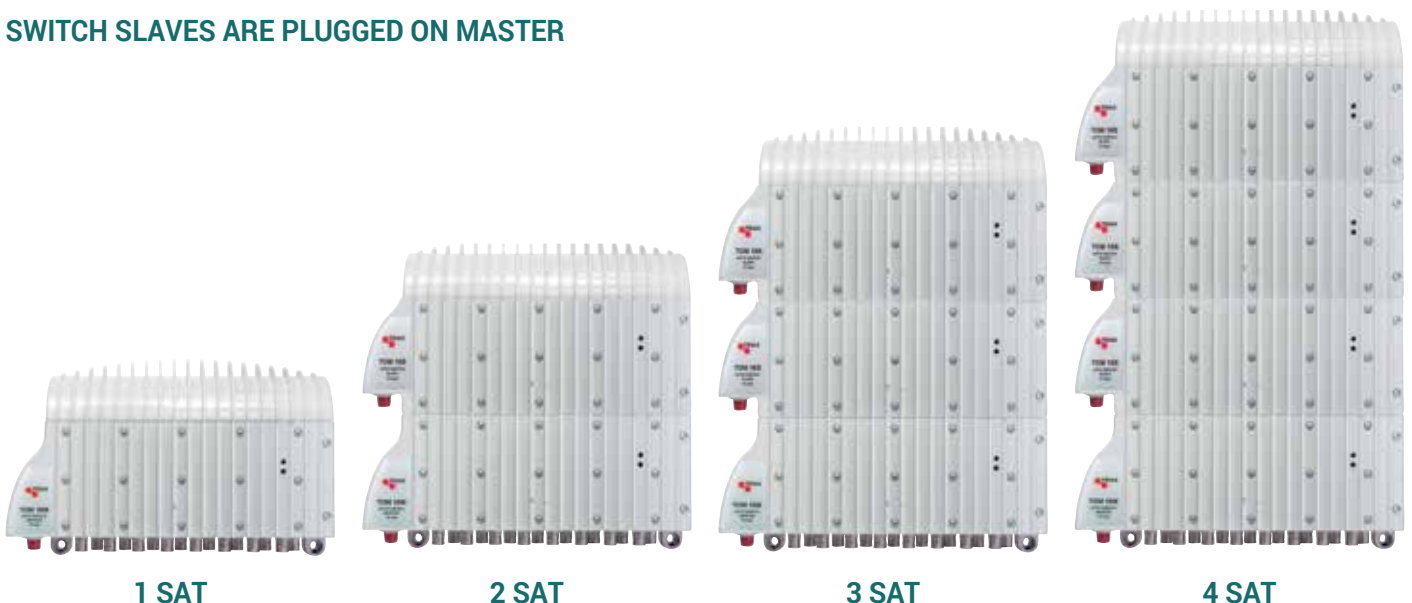

1 SAT

2 SAT

3 SAT

4 SAT

# Opto-Multiswitch

| SwitchMaster TOM 08 M / 16 M + SwitchSlave TOM 08 S / 16 S



Opto Switch Master



Opto Switch Slave


## Technical specification

| Type  |      | TOM 16 M / TOM 08 M             | TOM 16 S / TOM 08 S     |
|---|------|---------------------------------|-------------------------|
| Art. No.  |      | 307696 / 307697                 | 307698 / 307699         |
| Functionality   |      | Master<br>16 way / 8 way        | Slave<br>16 way / 8 way |
| Optical Input   |      |                                 |                         |
| Input Power with TOL 32, TOU 232SA/TOL 64                       | dBm  |                                 | -12...-3 / -14...-3     |
| Wavelength  | nm   |                                 | 1100...1650             |
| Input RF frequency range, vertical                              | GHz  |                                 | 0.95 – 3.0              |
| Input RF frequency range, horizontal                            | GHz  |                                 | 3.4 – 5.45              |
| Terrestrial frequency range, DTT                                | MHz  |                                 | 470...854               |
| Terrestrial frequency range, DAB                                | MHz  |                                 | 174...240               |
| Terrestrial frequency range, FM                                 | MHz  |                                 | 87...108                |
| Input connector   |      |                                 | FC/PC                   |
| Output SAT on ports   |      | 1...16 / 1...8                  |                         |
| Horizontal High Band (input: 4.4 to 5.45 GHz)                   | MHz  | 1100-2150, > 15,5 V 22 kHz      |                         |
| Vertical High Band (input: 1.95 to 3.0 GHz)                     | MHz  | 1100-2150, < 14,5 V 22 kHz      |                         |
| Horizontal Low Band (input: 3.4 to 4.4 GHz)                     | MHz  | 950-1950, > 15,5 V              |                         |
| Vertical Low Band (input: 0.95 to 1.95 GHz)                     | MHz  | 950-1950, < 14,5 V              |                         |
| Selection of satellite by DiSEqC                                |      | 1.0                             |                         |
| Current from receiver   | mA   | <35                             |                         |
| Impedance, nominal  | Ohm  | 75                              |                         |
| Return loss   | dB   | >10                             |                         |
| Automatic Gain Control (AGC)                                    | dB   | 30                              |                         |
| Output Level SAT (@ -7 dBm input)                               | dBμV | 75                              |                         |
| Output TER on ports   |      | 1...16 / 1...8                  |                         |
| Terrestrial frequency range, DTT                                | MHz  | 470...854                       |                         |
| Terrestrial frequency range, DAB                                | MHz  | 174...240                       |                         |
| Terrestrial frequency range, FM                                 | MHz  | 87...108                        |                         |
| Output Level DTT (6 multiplexes)                                | dBμV | ca. 69                          |                         |
| Common Data   |      |                                 |                         |
| Output connectors   |      | 16 x F-f / 8 x F-f              |                         |
| Current consumption (16 way based on 4 satellite configuration) | A    | <1.2                            |                         |
| Supply voltage  | V    | 11...20                         | from Master             |
| Mains desk top adapter (PSU)                                    | VAC  | 100...240 / +12V, 3,5A          |                         |
| Interface for frequency morphing (GUI)                          |      | UART / WinXP, Win7, Linux, M-OS |                         |
| Operating temperature   | °C   | -20...+50                       | -20...+50               |
| Weight  | kg   | 1.65 (incl. PSU)                | 1.15                    |
| Dimensions of an unit   | mm   | 227 x 138 x 67.5                | 227 x 95 x 67.5         |
| Dimensions 2 satellites   | mm   |                                 | 227 x 220 x 67.5        |
| Dimensions 3 satellites   | mm   |                                 | 227 x 303 x 67.5        |
| Dimensions 4 satellites   | mm   |                                 | 227 x 385 x 67.5        |

# Opto-Multiswitch

| SwitchMaster TOM 08 M / 16 M + SwitchSlave TOM 08 S / 16 S

System application Opto-Multiswitch for optical distribution in of 2xSAT + DTT/DVB/FM

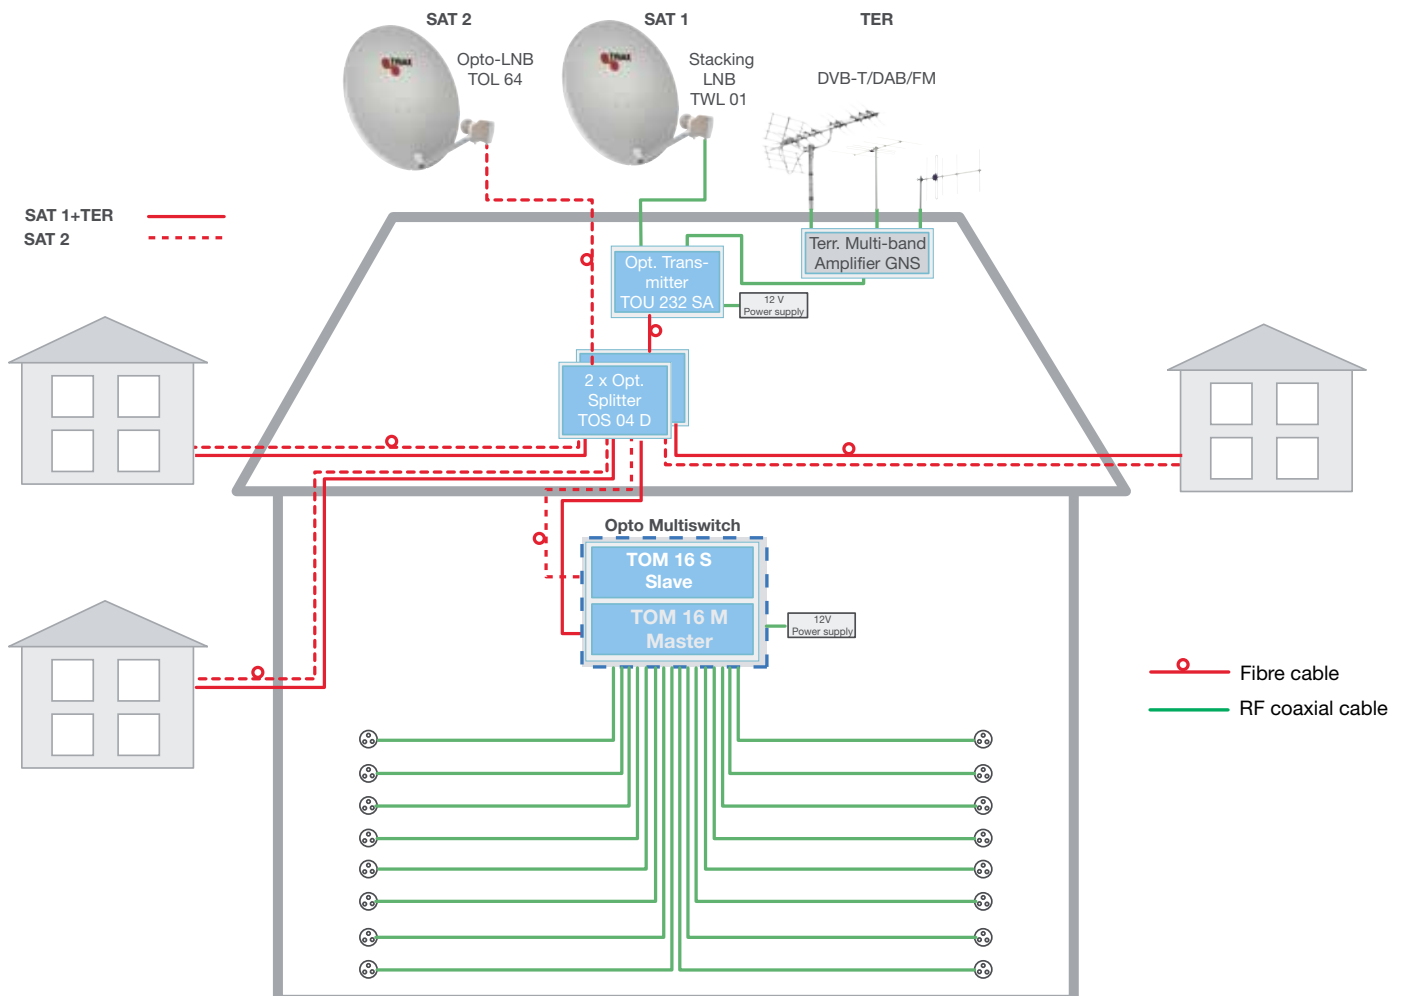

# Optical Splitters / Couplers

## Passive FC/PC splitter/coupler for optical Network

### TOS Optical splitters/couplers

The TOS couplers are pre-assembled with optical connectors FC/PC in a metal case.

- For single mode fibre systems
- Excellent mechanical stability
- Low insertion loss
- Coupler Technology  
 FBT (Fused Biconical Tapered)  
 PLC (Planar Lightwave Circuit)



### Balanced couplers (splitters), FC/PC

| Type                  | TOS 02 D     | TOS 03 D  | TOS 04 F    | TOS 08 F    | TOS 16 F    | TOS 32 F    |
|-----------------------|--------------|-----------|-------------|-------------|-------------|-------------|
| Art. No.              | 307636       | 307637    | 307736      | 307737      | 307734      | 307735      |
| No. of inputs         | 1            | 1         | 1           | 1           | 1           | 1           |
| No. of outputs        | 2            | 3         | 4           | 8           | 16          | 32          |
| Connection            | FC/PC        | FC/PC     | FC/PC       | FC/PC       | FC/PC       | FC/PC       |
| Technology            | FBT          | FBT       | PLC         | PLC         | PLC         | PLC         |
| Coupling ratio        | % 50/50      | 33/33/33  | 4x25        | 8x12.5      | 16x6.25     | 32x3.125    |
| Through Loss          | dB 3.5       | 5.6       | 7.2         | 10.2        | 13.6        | 16.7        |
| Wavelength            | nm 1310/1550 | 1310/1550 | 1260...1650 | 1260...1650 | 1260...1650 | 1260...1650 |
| Wavelength band width | nm ± 40      | ± 40      |             |             |             |             |

### Unbalanced couplers (taps), FC/PC

| Type                  | TOS 02 D-1090 | TOS 02 D-2080 | TOS 02D-3070 | TOS 02 D-4060 |
|-----------------------|---------------|---------------|--------------|---------------|
| Art. No.              | 307730        | 307731        | 307732       | 307733        |
| No. of inputs         | 1             | 1             | 1            | 1             |
| No. of outputs        | 2             | 2             | 2            | 2             |
| Connection            | FC/PC         | FC/PC         | FC/PC        | FC/PC         |
| Technology            | FBT           | FBT           | FBT          | FBT           |
| Coupling ratio        | % 10/90       | 20/80         | 30/70        | 40-60         |
| Through Loss          | dB 10.9/0.9   | 7.6/1.5       | 5.8/2.1      | 4.4/2.6       |
| Wavelength            | nm 1310/1550  | 1310/1550     | 1310/1550    | 1310/1550     |
| Wavelength band width | nm ± 40       | ± 40          | ± 40         | ± 40          |



# Optical Splitters / Couplers

| Passive SC/APC splitter/coupler for optical Network

## TOS Optical splitters/couplers

The TOS couplers are pre-assembled with optical connectors SC/APC in a metal case.

- For singlemode fibre systems
- Excellent mechanical stability
- Low insertion loss
- Coupler Technology
  - FBT (Fused Biconical Tapered)
  - PLC (Planar Lightwave Circuit)



## Balanced couplers (splitters), SC/APC

| Type                  | TOS 02 S     | TOS 04 S    | TOS 08 S    | TOS 16 S    | TOS 32 S    |
|-----------------------|--------------|-------------|-------------|-------------|-------------|
| Art. No.              | 307744       | 307738      | 307739      | 307747      | 307748      |
| No. of inputs         | 1            | 1           | 1           | 1           | 1           |
| No. of outputs        | 2            | 4           | 8           | 16          | 32          |
| Connection            | SC/APC       | SC/APC      | SC/APC      | SC/APC      | SC/APC      |
| Technology            | FBT          | PLC         | PLC         | PLC         | PLC         |
| Coupling ratio        | % 50-50      | 4x25        | 8x12,5      | 16x6,25     | 32x3,125    |
| Through Loss          | dB 3,5       | 7,2         | 10,2        | 13,6        | 16,7        |
| Wavelength            | nm 1310/1550 | 1260...1650 | 1260...1650 | 1260...1650 | 1260...1650 |
| Wavelength band width | nm ± 40      |             |             |             |             |

## Unbalanced couplers (taps), SC/APC

| Type                  | TOS 02 S-1090 | TOS 02 S-2080 | TOS 02S-3070 | TOS 02 S-4060 |
|-----------------------|---------------|---------------|--------------|---------------|
| Art. No.              | 307740        | 307741        | 307742       | 307743        |
| No. of inputs         | 1             | 1             | 1            | 1             |
| No. of outputs        | 2             | 2             | 2            | 2             |
| Connection            | SC/APC        | SC/APC        | SC/APC       | SC/APC        |
| Technology            | FBT           | FBT           | FBT          | FBT           |
| Coupling ratio        | % 10/90       | 20/80         | 30/70        | 40-60         |
| Through Loss          | dB 10,9/0,9   | 7,6/1,5       | 5,8/2,1      | 4,4/2,6       |
| Wavelength            | nm 1310/1550  | 1310/1550     | 1310/1550    | 1310/1550     |
| Wavelength band width | nm ± 40       | ± 40          | ± 40         | ± 40          |

# Fibre Optic Accessories

## | TFC Pre-assembled Fibre Cables

### Fibre Cables, Pre-assembled

Pre-assembled with optical connectors on both sides for easy and reliable installation

- Low attenuation of 0.3 dB per km
- Single-mode fibre G 657A, 9/125 µm
- **TFC version**, suitable for indoor installation
  - Flexible, steel-reinforced intermediate coat protects against pressure loads
  - 4 aramid fibers for strain relief when laying, max. tension on the cable: permanently 80 N, 100 N. briefly
- **TDB version** for burial installation.
  - Extremely resistant PE sheath, UV-resistant
  - Aramid reinforced inserts allow high max. Tensile forces: 1500 N briefly permanently 600N
  - Gel insert to protect from moisture
  - Without steel reinforcement

Fibre - TFC



Fibre - TDB



### Fibre cables, Steel-reinforced

| Type                                     | TFC 01 | TFC 03 | TFC 05    | TFC 10 | TFC 15 | TFC 20 |    |
|--|--------|--------|-----------|--------|--------|--------|----|
| Art. No.                                 | 307661 | 307662 | 307663    | 307664 | 307665 | 307666 |    |
| Assembled with                           | FC/PC  | FC/PC  | FC/PC     | FC/PC  | FC/PC  | FC/PC  |    |
| Attenuation 1310/1550 nm                 | dB/km  |        | 0,35/0,25 |        |        |        |    |
| Min. bending radius - one-time/permanent | mm     |        | 30/60     |        |        |        |    |
| Diameter cable                           | mm     |        | 3         |        |        |        |    |
| Diameter connector                       | mm     |        | 10        |        |        |        |    |
| Cable length                             | m      | 1      | 3         | 5      | 10     | 15     | 20 |

| Type                                     | TFC 30 | TFC 40 | TFC 50    | TFC 75 | TFC 100 | TFC 200 | TFC 500 |     |
|--|--------|--------|-----------|--------|---------|---------|---------|-----|
| Art. No.                                 | 307667 | 307668 | 307669    | 307670 | 307671  | 307672  | 307675  |     |
| Assembled with                           | FC/PC  | FC/PC  | FC/PC     | FC/PC  | FC/PC   | FC/PC   | FC/PC   |     |
| Attenuation 1310/1550 nm                 | dB/km  |        | 0,35/0,25 |        |         |         |         |     |
| Min. bending radius - one-time/permanent | mm     |        | 30/60     |        |         |         |         |     |
| Diameter cable                           | mm     |        | 3         |        |         |         |         |     |
| Diameter connector                       | mm     |        | 10        |        |         |         |         |     |
| Cable length                             | m      | 30     | 40        | 50     | 75      | 100     | 200     | 500 |

### Fibre cables, in-ground cable

| Type                                     | TDB 050 | TDB 100 | TDB 200   | TDB 500 |     |
|--|---------|---------|-----------|---------|-----|
| Art. No.                                 | 307760  | 307761  | 307762    | 307763  |     |
| Assembled with                           | FC/PC   | FC/PC   | FC/PC     | FC/PC   |     |
| Number of optical fibers                 | 2       |         |           |         |     |
| Attenuation 1310/1550 nm                 | dB/km   |         | 0,35/0,25 |         |     |
| Min. bending radius - one-time/permanent | mm      |         | 60/120    |         |     |
| Diameter cable                           | mm      |         | 5,9       |         |     |
| Diameter connector                       | mm      |         | 10        |         |     |
| Cable length                             | m       | 50      | 100       | 200     | 500 |

# Fibre Optic Accessories

| Connectors, Attenuators and Terminators

## Fibre Cables, connectors and attenuators

For making your own cable configuration we supply a professional range of connectors and tools

- Pigtails for fuse splicing to single mode fibre cables
- Adaptors to patch FC/PC or SC/PC connectors
- Fibre patch cords
- Optical attenuators for reducing the input level to the optical receivers



## Products for assembling

| Type           | FC/PC - Pigtail | SC/APC - Pigtail |
|----------------|-----------------|------------------|
| Art. No.       | 307581          | 307584           |
| Description    | Pigtail FC/PC   | Pigtail SC/APC   |
| Diameter cable | mm              | 3                |
| Cable length   | m               | 1                |

## Optical patch cords

| Type           | SC/APC-SC/APC<br>Opt. Patchkabel | FC/PC-SC/APC<br>Opt. Patchkabel |
|----------------|----------------------------------|---------------------------------|
| Art. No.       | 307580                           | 307582                          |
| Assembled with | SC/APC - SC/APC                  | FC/PC - SC/APC                  |
| Diameter cable | mm                               | 3                               |
| Cable length   | m                                | 2                               |

## Optical adaptor / terminator

| Type           | TFB 001     | TFB 002      |
|----------------|-------------|--------------|
| Art. No.       | 307684      | 307686       |
| Description    | Adapter     | Adapter      |
| Assembled with | FC/PC-FC/PC | FC/PC-SC/APC |

## Optical attenuator

| Type        | TFA 05 FC/PC | TFA 10 FC/PC | TFA 15 FC/PC |
|-------------|--------------|--------------|--------------|
| Art. No.    | 307688       | 307690       | 307692       |
| Description | Attenuator   | Attenuator   | Attenuator   |
| Attenuation | dB           | 5            | 10           |
|             |              |              | 15           |

# Fibre Optic Accessories

## | Optical meter, tools and connectors

### Optical level meter

Measurement of the optical signal level in fibre links

- Display of measured values in dBm or mW
- Facilitates troubleshooting
- Suitable for different wavelengths: 850, 1300, 1310, 1490, 1550 or 1625 nm
- Backlit, easy to read display

| Type                  | TOM 011                            |                                   |
|-----------------------|------------------------------------|-----------------------------------|
| Art. No.              | 307967                             |                                   |
| Wavelength            | nm                                 | 800 - 1700                        |
| Reading area          | dBm                                | -50 - +30                         |
| Inaccuracy            | %                                  | +/- 5%                            |
| Calibrated wavelength | nm                                 | 850, 1300, 1310, 1490, 1550, 1625 |
| Connections           | FC/PC and SC/PC                    |                                   |
| Operating time        | 140 Std. mit 3 x 1.5V AA-Batteries |                                   |
| Size (H X W X D)      | mm                                 | 190 x 100 x 50                    |
| Weight                | g                                  | 370                               |



### Optical - Accessories

Accessories for professional installation and service of optic products

| Type        | TSR 001       | TKS 001                   | TST 001              | TCT 002            |
|-------------|---------------|---------------------------|----------------------|--------------------|
| Art. No.    | 307649        | 307650                    | 307648               | 307647             |
| Description | Steel remover | Fibre kevlar scissor tool | Fibre stripping tool | Fibre Cleaver Tool |



| Type        | TCC 001                           | TSP 001                  | TCS 001                   |
|-------------|-----------------------------------|--------------------------|---------------------------|
| Art. No.    | 307652                            | 307654                   | 307656                    |
| Description | Cleaning cloth for optical fibres | Fibre Optic Cleaning Pen | Glass fibre cleaning swab |




# Installation example

## | Fibre optical reception of 4 SAT positions

Each SAT position needs one Opto-LNB connected with a separate passive optical network (PON).

Terrestrial reception can be implemented by replacement of The Opto-LNB by a TOU 232 kit (IRS1) (see page 8).

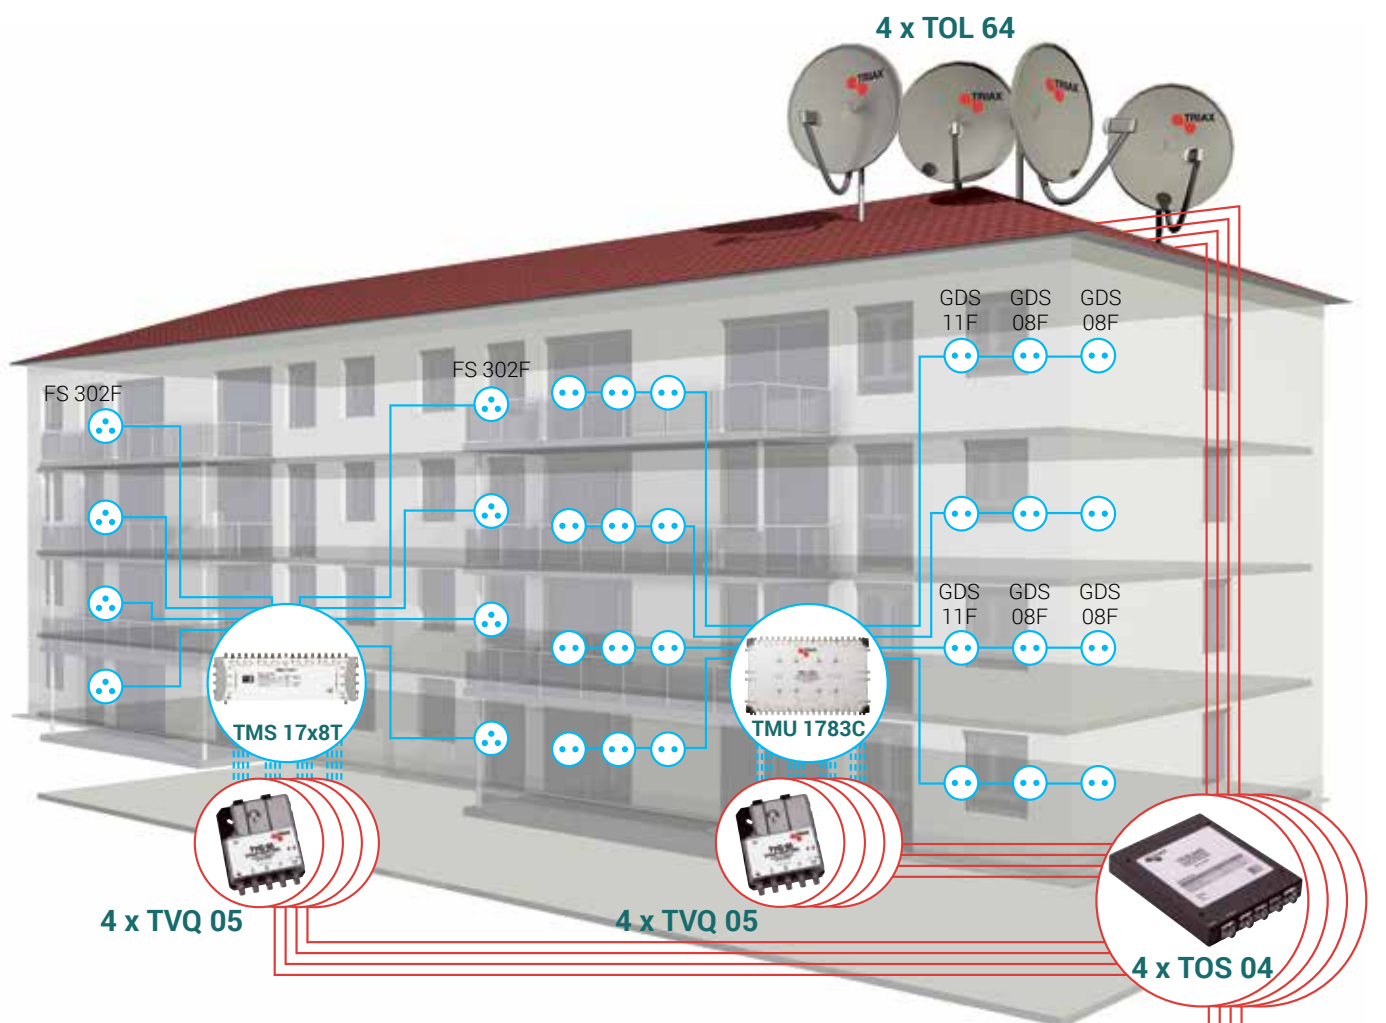

### Example:

- Full SAT reception of 4 SAT positions (16 SAT-bands) for every resident from one central satellite dish station
- Scalable from small to very large SMATV networks
- Cost efficient installation and operation
- FTTB combined with
  - Multi-Switches TMS 17xxC or TMS 17xxT
  - Multi-SCR Switches TMM 17x3C





Contact  
[triax.com/contact](http://triax.com/contact)

Headquartered in Denmark, Triax is an international supplier of innovative, high-tech solutions for the reception and distribution of video, audio and data signals. The company's products and solutions are used by broadcasters, cable operators, local closed networks and domestic dwelling.

Triax has 9 sales subsidiaries generating a turnover of approx. €90M and operates in more than 60 distributor countries. The TRIAX team consists of 350 employees and is owned Polaris Private Equity.

See [triax.com](http://triax.com) for further info.

Copyright © 2015 TRIAX. All rights reserved. The TRIAX Logo and TRIAX, TRIAX Multimedia are registered trademarks or trademarks of the TRIAX Company or its affiliates. All specifications in this brochure are subject to change without further notice.

12-2015



[triax.com](http://triax.com)